



**Ramco  
Fiber Cement  
Sheet is better  
than any  
Metal Sheet**



**Ramco**  
**POWERROOF**  
Fibre Cement Sheet

#### The Stamp of Strength

Fully automated manufacturing process gives added strength to the fibre cement sheets.

Ensures 100% accuracy at every stage mixing, forming, cutting, corrugating and stacking.

#### The Stamp of Durability

Made with imported Chrysotile Fibres with eight times the strength of steel.




Resists fire, rot, rust, vermin, brittle fractures and alkali attacks. Strengthens with age.

#### Detail of side Lap Ramco Powerroof Sheet



#### Dimensional Data

Thickness (nominal)	6.00 mm
Overall width	1.05 m
Laid width	1.01 m
Cover efficiency (Allowing for side and end laps with 3 m sheet)	91%
Actual cover of 3 m sheet as laid	2.88 sq.m.
100 sq.m. laid area requires of sheeting (Allowing for loss by side end laps with 3 m sheets)	109.43 sq.m
100 sq.m. laid area requires of sheeting (Allowing for loss by side end laps with 1.5 m sheets)	115.51 sq.m
100 sq.m. laid area with other sizes between 1.5.m and 3 m sheets requires sheeting	Between 115.51 sq.m. & 109.43 sq.m.
Weight of 100 sq.m. as laid	1.40 M. Tonnes
Standard lengths	1.5, 1.75, 2.0, 2.5 & 3m
Purlin spacing	1.4 m (max)
Spacing of rails for side cladding	1.7 m (max)
Horizontal lap	150 mm
Colours available	Natural Grey, Blue, Green & Terracotta

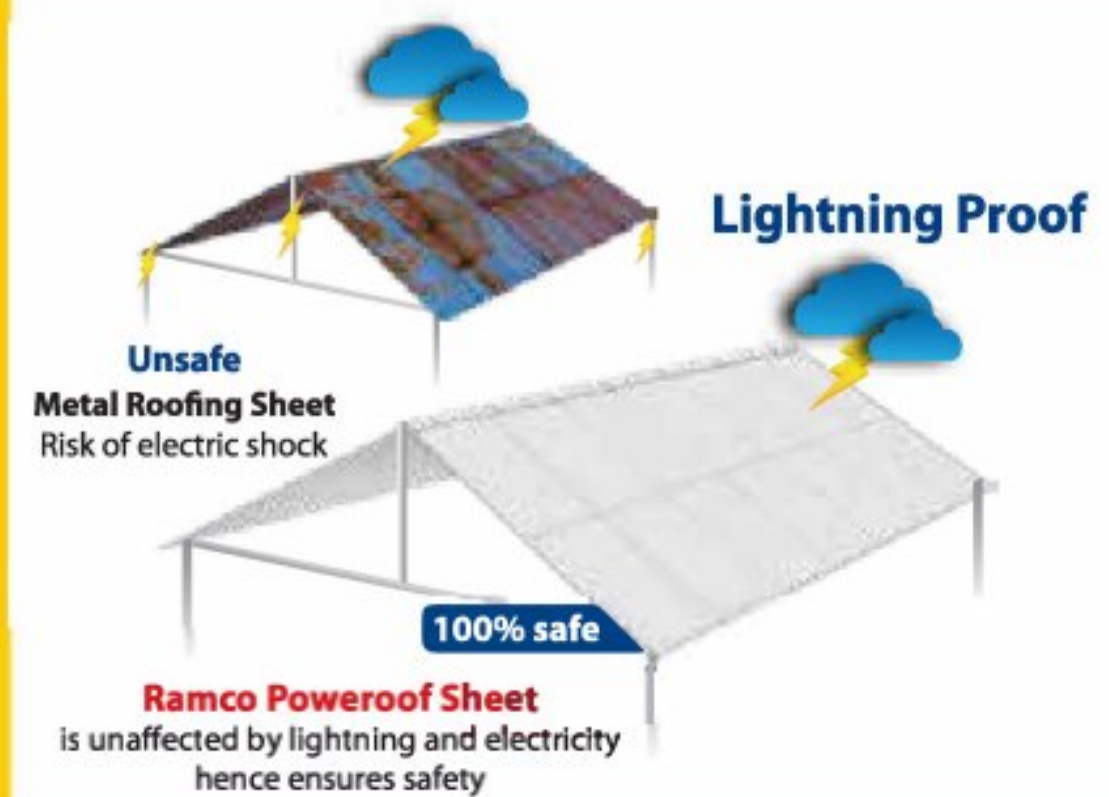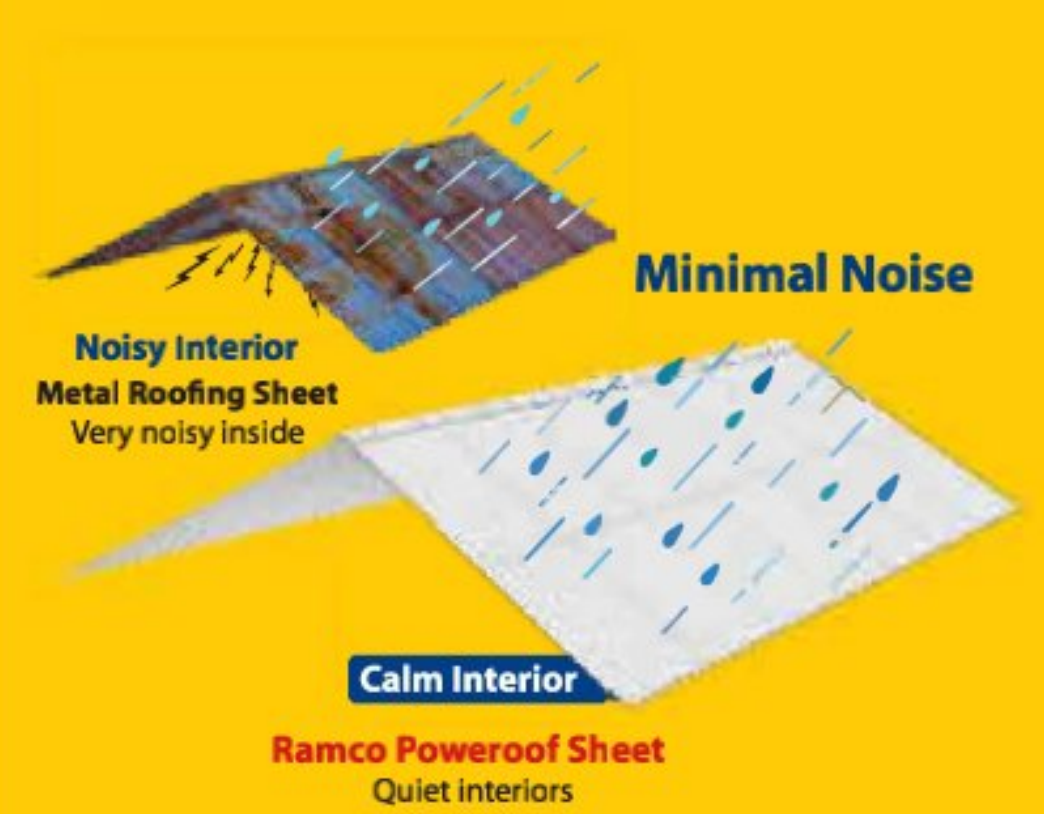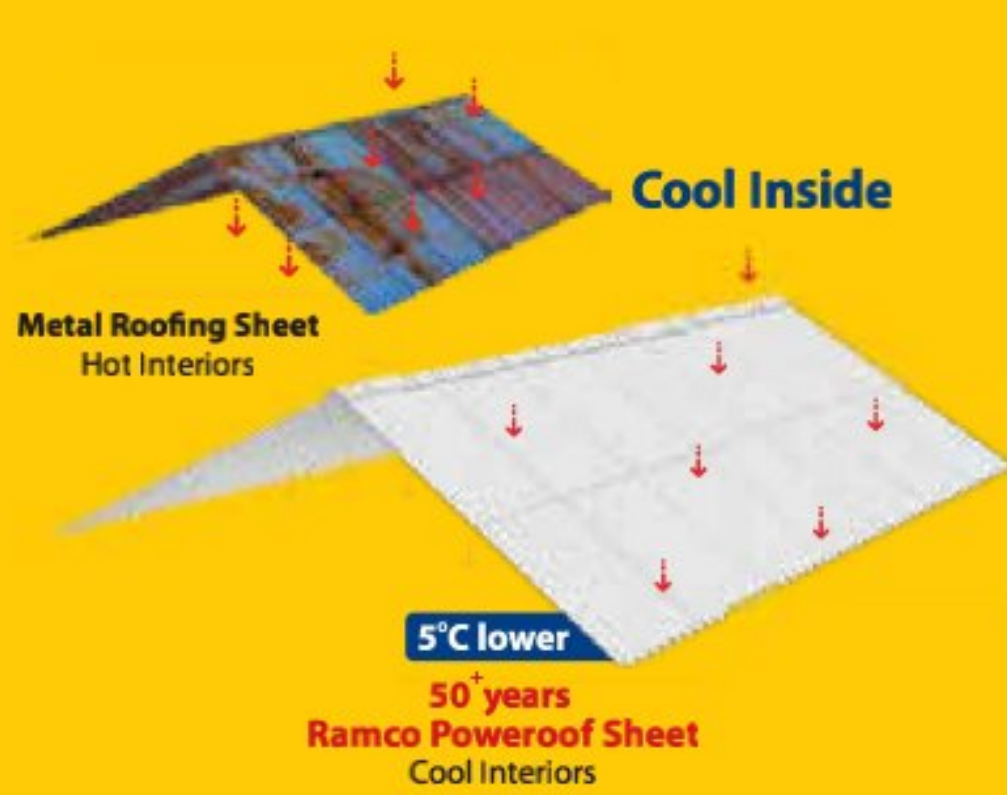

## Recommended work practices during installation

1. To keep dust levels down, cutting and drilling operations must be carried out in the open or well-ventilated areas.
2. Use hand-operated tools such as drills, hand-saw etc.
3. Use of pneumatic/electric power tools and abrasive discs is not recommended.
4. Any waste created during working operation should be collected after damping, in impervious bags and buried underground.

## Ramco Powerroof for every need

- Poultry Farms ■ Cow Sheds ■ Weaving Units
- Marriage Halls ■ Happy Homes
- Tea Shops ■ Tailor Shops ■ Machine Shops

## CAUTION

Asbestos Cement products present no known risk to health as they contain only a small percentage of asbestos firmly "locked-in" with cement during manufacture.

Use of power operated tools without proper dust extraction system creates dust and prolonged breathing of asbestos dust is injurious to health.

Avoid creating dust and follow recommended work practice.

Dealer:

© Copyright 2025 Ramco Industries Limited. All rights reserved. Information given is to the best of our knowledge and belief, accurate and reliable as of the date compiled. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use.

As our policy of continuous improvement, we reserve the right to modify our specifications any time without notice. Product colours and texture may vary due to climatic conditions or due to limitations in the brochure printing process. Please check the latest version on the website or contact your local Ramco Industries representative

For enquiries/assistance call:

044 4298 3109 / +91 91767 75882

✉ info@ril.co.in www.ramcoindltd.com